



DATASHEET

LOGI DOCK

Upgrade the remote working experience with Logi Dock, an all-in-one docking station with one-touch meeting controls and a built-in speakerphone. Certified for leading video conferencing platforms and easy to set up, Logi Dock connects everything in one tidy unit, replaces the need for extra peripherals, and eliminates a tangle of cables and wires.

THE ULTIMATE DOCK FOR HYBRID WORKERS

Logi Dock is an all-in-one docking station with meeting controls and enterprise-quality audio that simplifies personal workspaces and improves the WFH experience.

Designed to declutter the desktop, Logi Dock provides a single connection point for up to five USB peripherals and two monitors¹, while powering your laptop up to 100 watts.

With calendar integration² and support for your favorite video conferencing services like Google Meet™, Microsoft Teams®, Zoom™ and Tencent Meeting, Logi Dock makes it easy to join your next meeting. Just press a button and you're in.

For high-quality calls, Logi Dock features a built-in, noise-canceling speakerphone, which also delivers impressive stereo sound when you want music as your work companion.


TAKE CONTROL OF YOUR MEETING

Integrated with leading video conferencing platforms such as Microsoft Teams®, Google Meet™, Zoom™ and Tencent Meeting, Logi Dock allows you to instantly join any meeting with a single touch².



Simple Meeting Controls with Visual Alerts

Control audio and camera at your fingertips by pressing the mute, volume, or video buttons. Get alerts about upcoming video calls from the ambient light indicators.

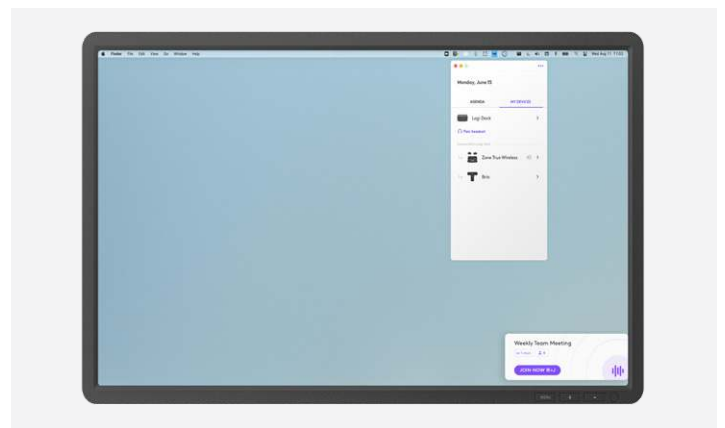

Calendar Integration with Tune

With calendar integration² via Logi Tune, you can stay on top of your day, get informed of upcoming appointments, and quickly join meetings with a simple touch of a button.

UNCLUTTER YOUR DESKTOP



Logi Dock connects up to five USB peripherals, and up to two monitors¹ while charging your laptop up to 100 watts. With fewer cords and dongles, and less visual clutter, Logi Dock makes room for cleaner workspaces and better work days.

HEAR & BE HEARD CLEARLY



Noise-canceling Speakerphone

Six beamforming microphones help capture your voice clearly while advanced algorithms reduce unwanted background noise.



Easy Audio-Switch³

For private conversations, switch the audio from Logi Dock's speakerphone to your personal audio by turning on your Zone Wireless (Plus) headset or inserting your Zone True Wireless earbuds.



Add Music to Your Workday

Logi Dock's expertly-tuned speakers deliver immersive, crystal-clear sound, so you can enjoy your favorite tunes between or after meetings. Pair to your smartphone or tablet via *Bluetooth*[®] to stream audio.

SYSTEM REQUIREMENTS	COMPATIBILITY AND CERTIFICATIONS	PACKAGE CONTENTS
<p>Works with Windows®, macOS or Chrome™ based computers via USB-C with Alt Mode, and iOS or Android™ Bluetooth®-enabled devices</p> <p>Software downloads: Logitech Sync: Device management Logi Tune: Calendar integration and customization</p>	<p>Certified for Microsoft Teams®, Google Meet™, Google Voice™, Zoom™ and Tencent Meeting</p> <p>Works with other popular applications to ensure compatibility and seamless integration in the workplace</p> <p>See www.logitech.com/support/Logi-Dock-compatibility for pending and granted certifications and compatibility updates</p>	<p>Logi Dock Power supply (5.2 ft/1.6 m) AC power cord (5.6 ft/1.7 m) USB-C to USB-C (3.3 ft/1 m) User documentation</p>
AUDIO	DOCKING STATION	
<p>Microphone type: 6 beamforming mics with advanced algorithms</p> <p>Sound quality: Crystal-clear sound delivered by 2 custom 55 mm neodymium audio drivers and 2 passive radiators</p> <p>Smart audio switch³: Automatically switch the audio between the built-in speakerphone and Zone True Wireless earbuds/Zone Wireless (Plus) headset</p>	<p>Power to system: Up to 100 watt charging Security slot type: Kensington security slot</p> <p>Ports: 1 x HDMI v. 2.0 (Support up to 4K, i.e. 3840 x 2160 @60Hz HDR)¹ 1 x DisplayPort 1.4 (Support up to 4K, i.e. 3840 x 2160 @60Hz HDR)¹ 2 x USB-A <ul style="list-style-type: none"> • 1 x USB3.1 Gen 1 (5 Gbps) with 4.5W charging¹ • 1 x USB3.1 Gen 1 (5 Gbps) with 7.5W fast charging 3 x USB-C <ul style="list-style-type: none"> • 2 x USB3.1 Gen 1 (5 Gbps) with 4.5W charging¹ • 1 x USB3.1 Gen 1 (5 Gbps) with 7.5W fast charging 1 x USB-C Upstream 1 x AC power (230 W, 19.5 V)</p>	
CONTROLS AND ALERTS	DIMENSION AND WEIGHT	
<p>Controls: One-touch meeting controls², volume/mute/video/call controls, Bluetooth® pairing⁴</p> <p>Audio alerts: Sonification</p> <p>Visible alerts: Light indicators for mute on/off, video on/off, incoming/active call; Ambient light for upcoming meetings and in-call status</p> <p>Customization: Through Logi Tune, sync your calendar to join video meetings with one touch, customize EQ and button</p>	<p>Height x Width x Depth: 84.8 x 160.0 x 131.5 mm 3.34 x 6.30 x 5.18 in</p> <p>Weight: 0.942 kg/33.23 oz</p>	
EXTENDED WARRANTY	PART NUMBERS	
	<p>Ensure optimal performance of your Logitech video collaboration device for up to five years with the Extended Warranty for Logi Dock, which adds either one or three additional years to the standard two-year limited hardware warranty.</p> <p>Contact your reseller for availability.</p> <p>Standard two-year limited hardware warranty included.</p> <p>UC Logi Dock: Graphite: 986-000025 Off-white: 986-000031</p> <p>Teams Logi Dock: Graphite: 986-000015</p> <p>Extended Warranty for Logi Dock: 1-year: 994-000167 3-year: 994-000166</p>	



www.logitech.com/logidock

Contact your reseller or contact us at www.logitech.com/vcsales

Logitech Americas
7700 Gateway Blvd.
Newark, CA 94560 USA

Logitech Europe S.A.
EPFL - Quartier de l'Innovation
Daniel Borel Innovation Center
CH - 1015 Lausanne

Logitech Asia Pacific Ltd.
Tel : 852-2821-5900
Fax : 852-2520-2230

¹ Refer to www.logitech.com/logidock for device compatibility

² Download Logi Tune at www.logitech.com/tune for calendar integration with Google Calendar and Office 365 and one-touch meeting controls

³ Available in the beta version.

⁴ For Bluetooth®-enabled mobile devices only

© 2022 Logitech. Logitech, the Logitech logo and other Logitech marks are owned by Logitech and may be registered. All other trademarks are the properties of their respective owners. Logitech assumes no responsibility for any errors that may appear in this publication. Product, pricing and feature information contained herein is subject to change without notice.